

VISIGO INTERURBAN





TECHNICAL SPECIFICATIONS Dimensions (mm)	
Maximum Length	9560
Maximum Width	2454
Maximum Height	3368 (including A/C unit)
Wheelbase	4660
Front Overhang	1890
Rear Overhang	3010
Front Track Width	2012
Rear Track Width	1751
Inner Height	max.: 1950
Weights (kg)	
Gross Vehicle Weight	12700
Curb Weight	9150 kg (including full tank full, driver and assistant)
Front Axle Capacity	4500
Rear Axle Capacity	8500
Engine	
Model	CUMMINS ISB6,7E6C250B
Type	Commonrail Turbo Diesel Intercooler
Cylinders	6
Displacement (cc)	6700
Maximum power (HP /rpm)	182 (244) / 2100
Maximum Torque (Nm/rpm (Kgm/rpm)	982 / 1400
Exhaust Gas Emission Class	Euro VI OBD C
Clutch	Dry type
Transmission	
Model	ZF 6AS1010BO (Automated)
Number of gears, type	6 forward, 1 reverse, overdrive
Final gear ratio	4.1
Steering System	Hydraulic
Tyres	265/70 R19,5
Minimum Turning Radius (mm)	7100 mm
Gradeability (%)	49,20
Suspensions	
Front	Air suspension - 2 bellows Independent suspension
Rear	Air Suspension - 4 bellows
Kneeling System	S
Brake System	
Front / Rear	Disc / Disc
Brake Structure	EBS - electonic brake system
Service	full air system dual circuit electronical actuated
Parking brake	acting on rear axle spring actuated
Auxiliary brake	Turbo brake and retarder
Fuel Tank	
Fuel Tank Capacity (II)	250
Fuel Tank Cap Lock	S
Diesel Exhaust Fluid Tank (lt)	19
Luggage Compartment	
Luggage Capacity (m3)	4
Central Locking System	Opt
Luggage Compartment Doors	Vertically upwards opening of luggage door
Carpet Cover Inside	S
Luggage Compartment Door Warning	S
Hand Baggage Compartment	8
Electrical System	garr
Nominal Voltage	24V
	24V (2x12V) -150 Ah
Battery	VALIDADO NA PROSENCIA DE LA CALIFORNIA D
Battery Starter Engine	24V - 5 kW
Battery Starter Engine Generator	24V - 5 kW 28V - 2x90 A (2 Units)
Battery Starter Engine	








EQUIPMENTS	
Heating & Ventilation	
Digital One Touch Control For Heating and Cooling	s
Pre-heater	S (Webasto 16 kW)
Air-blowing Type Heater (Front)	S
Tire Inflator	S
Full Automatic Heating and Cooling	S
Convector Heater	
Air Conditioner	
A/C Capacity	Digital Safkar air conditioner with 425 cc compressor Capacity: 24400 kcal/h (28,4 kW)
Air Conditioner With Heater	S
A/C Dashboard Unit For Driver	S
Safety & Driving Comfort	
Cruise Control	S
Speed Limitor	S
Tachograph	S (Digital)
Retarder	S
EBS (ABS+ASR)	S
ESC	S
Fire Sensor And Warning System In Engine Compartment	Opt
Roof Emergency Exit & Ventilation Hatch	S
Parking Sensor	S (Rear)
Indirect view camera	S
Engine room automatic fire extinguisher system	Opt
Exterior	
Side Stripe Stickers	Opt
Metallic Colour	Opt
Roof spoiler	S
Rim Caps (Metal)	S
Towing Device	S (Front and rear)
Doors	
Front / Rear Door	Single wing air actuated outwards opening
Lift Door (Manuel)	Opt
Remote Control	S

Passenger Window	
Single Piece, Double Glazing	S
Others	
Trailer Towing System	Opt
Daytime Running Lamp, DRL	S (LED)
High Mount Stop Lamp	S
Fog Lamps (Front)	S
Reverse Gear Warning Beeper	S
Interior	
Driver Seat	
Driver's Seat	Ergonomic, Air Operated, Adjustable
Driver's Window	Manuel, Anti-mist Heater
Front Door Window	Double Glazing
Windscreen Blind (Manuel Controlled)	S
Electrically Controlled Side Rear View Mirrors	S
Heated Long Arm Mirrors	S
Close-proximity Exterior Mirror	S
Lamp For Driver	S (LED)
Passenger Seats	
Seat Upholstery	Fabric
Armrests*	Aisle Side (S)
Seat Back Magazine Net	S
Safety Belts	2 Points (S)
Seat Back Magazine Net & Tray	S
Passenger Compartment	
Ceiling Upholstery	Formica
Side Wall Upholstery	Fabric
Floor Covering	Vinyl Floor
Interior Lighting	Continuous on Ceiling
Audio & Visual	
Speaker	S
Monitor / LCD	Opt
Digital Clock	S (Thermometer & Clock)
Refrigerator (Dashboard)	Opt

S: Standard Opt: Optional



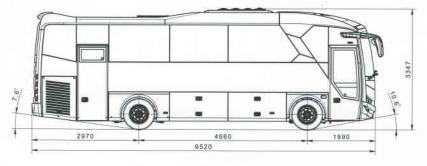



Anadolu Isuzu's 9,5 meter medium-coach, Visigo, has Euro 6 Cummins engine which produces 244 HP at 2100 rpm. The new Visigo provides a comfortable journey to the driver and the passengers with its stylish interior and exterior design, and comfort equipments.

VISIGO INTERURBAN



October 2017